

Press Products Warranty

Subject to the conditions and limitation in this limited warranty, **Cello Products** warrants to wholesalers and licensed plumbing and mechanical contractors in the United States and Canada that its press product line, when properly installed, provided they are used as intended, will be free of failure from manufacturing defects for a period of fifty (50) years for fittings and ten (10) years for valves from the date of installation. The warranty covers only installations using copper tube conforming to ASTM B series method. The warranty does not cover installations using Soft Copper Tubing, or other manufacturers faulty products installed in a common or shared installation.

In the event of a leak or other failure of the parts covered by this warranty, it is the responsibility of the property owner to obtain and pay for repairs. Only if the warranty applies will Cello be responsible for the remedy under this warranty. The part or parts which you claim failed should be kept and Cello contacted by writing or by phone **(1-800-265-7882)** within thirty (30) days of the failure; identifying yourself as having a warranty claim. You should be prepared to ship, at your expense, the product which you claim failed due to a manufacturing defect and document the date of the installation. Within a reasonable time after receiving the product, Cello will investigate the reason for failure, which includes the right to inspect product(s) at Cello's facility. **Cello Products** will notify you in writing of the results of its review. The company will not be responsible for labour charges or other expenses created by the replacement of the defective product or damage from its use.

In the event Cello determines that the failure or leak was the result of a manufacturing defect in the part covered by this warranty, and that this warranty applies, the exclusive and only remedy under this warranty shall be the reimbursement for repair and/or replacement of the part.

THE ABOVE WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

If a limited warranty shall be found to apply, such warranty is limited to for (4) years.

Cello Products does not authorize any person or firm to create for it any other obligation or liability in connection with its products.

Cello fittings must be installed by a licensed Plumbing Contractor and installations must adhere to the recommended pressure rating of the Press Fitting System for testing and operation for Warranty eligibility.



CELLO PRODUCTS

Why use copper press fittings?

Copper press utilizes a unique process which can eliminate the excess copper that normally accumulates in the pipe fittings. This allows water or gas to flow smoothly throughout the piping systems. By reducing the resistance within the system, this improves the performance of the overall system.

A more secure way for connection

Copper press fittings adopt a unique limit slot design. Compared to the traditional limit points, this design can effectively avoid product rupture and leakage when creating joints, so that customers can use the products more safely and securely.

Feature & Benefits

- Fully Certified
- Reliable and simple to use
- Secure and permanent joint
- Practical design
- Leak indicator
- Flame-free installation

Six simple steps to install



1 Cut the pipe to the length required



2 Remove any burrs left from cutting



3 Ensure O-rings are correctly in place



4 Mark the insertion depth



5 Ensure pipe is inserted fully to the stop



6 Press and finish

Copper Press fittings can be pressed with Milwaukee, REMS, Rigid and Rothenberger tools and associated CTS jaws. Contact Cello Products Customer Service for specific jaw set capability.

**Compliant with
ASME B16.51**

**Uniform Plumbing Code (UPC)
International Plumbing Code (IPC)**

**Section 116875 of the
California- Health & Safety Code**

**NSF/ANSI/CAN 61-2022
Drinking Water System Components
Health Effects**

**NSF/ANSI/CAN 372-2022,
Drinking Water System Components
Lead Content**

**Building Materials Evaluation
Commission (Ontario)
Authorized – BMEC**



FLUIDS / WATER / POTABLE			
Application	Comments	Pressure/PSI	Temperature/°F
Hot & cold potable water	-	300	32 to 250
Rain water	-	300	-20 to 250
Chilled water	Ethylene - glycol/propylene glycol	300	-20 to 250
Hydronic heating	Ethylene - glycol/propylene glycol	300	-20 to 250
Cooling water	Up to 50% ethylene glycol or propylene glycol solution	200	-20 to 250
Low-pressure steam	-	Up to 5	248
FUEL OIL AND LUBRICANT			
Ethanol	Pure grain alcohol	200	-
NON-MEDICAL GASES			
Compressed Air	Less than 25mg/m3 oil content	200	-
Oxygen-O ₂ (nonmedical)	Keep oil and fat free/non-liquid O ₂	140	Up to 140
Nitrogen-N ₂	-	200	Up to 140
Argon	Welding use	200	Up to 140
Hydrogen-H ₂	-	125	Up to 140
Vacuum	-	Max 29.2 inches of Mercury	Up to 140
Carbon Dioxide	-CO ₂ Dry	200	Up to 140



Press x Press 90° Elbow

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP7-08	1/2	10	240	0.12
BP7-12	3/4	10	100	0.2
BP7-12-08	3/4 x 1/2	15	240	0.15
BP7-16	1	5	60	0.29
BP7-16-12	1 x 3/4	10	70	0.25
BP7-20	1 1/4	2	36	0.4
BP7-24	1 1/2	2	20	0.79
BP7-32	2	2	12	1.21
BP7-40	2 1/2	1	12	2.09
BP7-48	3	1	9	2.1
BP7-64	4	1	4	5.61




Press x Fitting 90° Elbow

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP7-2-08	1/2	10	240	0.11
BP7-2-12	3/4	10	100	0.19
BP7-2-16	1	5	60	0.27
BP7-2-20	1 1/4	2	36	0.41
BP7-2-24	1 1/2	2	20	0.76
BP7-2-32	2	2	12	1.16
BP7-2-40	2 1/2	1	14	2.05
BP7-2-48	3	1	9	3.03
BP7-2-64	4	1	4	5.68



Press x Female IPS Drop Ear 90° Elbow

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP735-08	1/2	10	80	0.29
BP735-12	3/4	8	64	0.43



Press x Press 45° Elbow

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP6-08	1/2	10	240	0.1
BP6-12	3/4	10	120	0.16
BP6-16	1	5	60	0.22
BP6-20	1 1/4	4	40	0.31
BP6-24	1 1/2	2	24	0.6
BP6-32	2	2	12	0.87
BP6-40	2 1/2	1	16	1.74
BP6-48	3	1	12	2.27
BP6-64	4	1	6	4.1



Press x Fitting 45° Elbow

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP6-2-08	1/2	10	240	0.09
BP6-2-12	3/4	10	120	0.15
BP6-2-16	1	10	60	0.21
BP6-2-20	1 1/4	4	40	0.3
BP6-2-24	1 1/2	2	20	0.58
BP6-2-32	2	2	12	0.84
BP6-2-40	2 1/2	1	16	1.56
BP6-2-48	3	1	12	2.32
BP6-2-64	4	1	6	3.95



Press x Press x Press Tee

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPT-08	1/2	10	120	0.21
BPT-12	3/4	10	60	0.35
BPT-16	1	4	40	0.51
BPT-20	1 1/4	2	24	0.66
BPT-24	1 1/2	2	16	1.22
BPT-32	2	1	8	1.72
BPT-40	2 1/2	1	10	2.12
BPT-48	3	1	6	3
BPT-64	4	1	4	5.46



Press Reducing & Female Tee



Press x Press x Press Tee - Reducing


Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPT-08-08-12	1/2 x 1/2 x 3/4	10	80	0.29
BPT-08-08-16	1/2 x 1/2 x 1	10	60	0.32
BPT-12-08-08	3/4 x 1/2 x 1/2	10	70	0.28
BPT-12-08-12	3/4 x 1/2 x 3/4	10	30	0.33
BPT-12-12-08	3/4 x 3/4 x 1/2	10	80	0.29
BPT-12-12-16	3/4 x 3/4 x 1	5	80	0.4
BPT-16-08-12	1 x 1/2 x 3/4	10	60	0.44
BPT-16-08-16	1 x 1/2 x 1	10	40	0.48
BPT-16-12-08	1 x 3/4 x 1/2	10	60	0.51
BPT-16-12-12	1 x 3/4 x 3/4	10	60	0.43
BPT-16-12-16	1 x 3/4 x 1	10	40	0.48
BPT-16-16-08	1 x 1 x 1/2	10	60	0.41
BPT-16-16-12	1 x 1 x 3/4	10	40	0.45
BPT-16-16-20	1 x 1 x 1 1/4	4	28	1.02
BPT-20-08-20	1 1/4 x 1/2 x 1 1/4	1	40	0.81
BPT-20-12-08	1 1/4 x 3/4 x 1/2	4	50	0.65
BPT-20-12-12	1 1/4 x 3/4 x 3/4	4	28	0.73
BPT-20-12-16	1 1/4 x 3/4 x 1	4	28	0.78
BPT-20-12-20	1 1/4 x 3/4 x 1 1/4	4	24	0.85
BPT-20-16-08	1 1/4 x 1 x 1/2	1	45	0.65
BPT-20-16-12	1 1/4 x 1 x 3/4	4	24	0.7
BPT-20-16-16	1 1/4 x 1 x 1	4	24	0.75
BPT-20-16-20	1 1/4 x 1 x 1 1/4	4	24	0.8
BPT-20-20-08	1 1/4 x 1 1/4 x 1/2	4	24	0.45
BPT-20-20-12	1 1/4 x 1 1/4 x 3/4	4	40	0.5
BPT-20-20-16	1 1/4 x 1 1/4 x 1	4	32	0.56
BPT-24-08-24	1 1/2 x 1/2 x 1 1/2	2	16	1.75
BPT-24-16-12	1 1/2 x 1 x 3/4	2	18	1.08
BPT-24-16-16	1 1/2 x 1 x 1	2	18	1.15
BPT-24-16-24	1 1/2 x 1 x 1 1/2	2	16	1.46
BPT-24-20-12	1 1/2 x 1 1/4 x 3/4	1	25	1.11
BPT-24-20-16	1 1/2 x 1 1/4 x 1	2	16	1.17
BPT-24-20-20	1 1/2 x 1 1/4 x 1 1/4	2	16	1.24
BPT-24-24-08	1 1/2 x 1 1/2 x 1/2	4	24	0.75
BPT-24-24-12	1 1/2 x 1 1/2 x 3/4	4	24	0.84
BPT-24-24-16	1 1/2 x 1 1/2 x 1	4	24	0.92
BPT-24-24-20	1 1/2 x 1 1/2 x 1 1/4	4	24	1.06
BPT-32-08-32	2 x 1/2 x 2	1	10	2.26
BPT-32-12-32	1 1/2 x 3/4 x 1 1/2	1	10	1.71
BPT-32-16-16	2 x 1 x 1	1	12	1.83
BPT-32-20-20	2 x 1 1/4 x 1 1/4	1	12	1.72
BPT-32-24-12	2 x 1 1/2 x 3/4	1	12	1.7
BPT-32-24-16	2 x 1 1/2 x 1	1	12	1.73
BPT-32-24-20	2 x 1 1/2 x 1 1/4	1	12	1.82
BPT-32-24-24	2 X 1-1/2 X 1-1/2	1	12	1.96
BPT-32-24-32	2 x 1 1/2 x 2	1	12	2.18
BPT-32-32-08	2 x 2 x 1/2	1	12	0.98
BPT-32-32-12	2 x 2 x 3/4	1	12	1.19
BPT-32-32-16	2 x 2 x 1	1	12	1.28
BPT-32-32-20	2 x 2 x 1 1/4	1	12	1.33

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPT-32-32-24	2 x 2 x 1 1/2	1	12	1.52
BPT-40-12-40	2 1/2 x 3/4 x 2 1/2	1	12	3.96
BPT-40-16-40	2 1/2 x 1 x 2 1/2	1	12	3.97
BPT-40-24-40	2 1/2 x 1 1/2 x 2 1/2	1	12	4.13
BPT-40-32-12	2 1/2 x 2 x 3/4	1	12	2.73
BPT-40-32-16	2 1/2 x 2 x 1	1	12	2.86
BPT-40-32-24	2 1/2 x 2 x 1 1/2	1	10	3.25
BPT-40-32-32	2 1/2 x 2 x 2	1	10	1.764
BPT-40-40-08	2 1/2 x 2 1/2 x 1/2	1	18	1.52
BPT-40-40-12	2 1/2 x 2 1/2 x 3/4	1	18	1.63
BPT-40-40-16	2 1/2 x 2 1/2 x 1	1	16	1.7
BPT-40-40-20	2 1/2 x 2 1/2 x 1 1/4	1	15	1.78
BPT-40-40-24	2 1/2 x 2 1/2 x 1 1/2	1	12	1.92
BPT-40-40-32	2 1/2 x 2 1/2 x 2	1	10	2.12
BPT-48-12-48	3 x 3/4 x 3	1	9	5.6
BPT-48-16-48	3 x 1 x 3	1	9	5.6
BPT-48-32-32	3 x 2 x 2	1	9	4.11
BPT-48-40-32	3 x 2 1/2 x 2	1	9	4.98
BPT-48-48-08	3 x 3 x 1/2	1	12	1.49
BPT-48-48-12	3 x 3 x 3/4	1	12	2.14
BPT-48-48-16	3 x 3 x 1	1	12	2.23
BPT-48-48-20	3 x 3 x 1 1/4	1	10	2.32
BPT-48-48-24	3 x 3 x 1 1/2	1	10	2.54
BPT-48-48-32	3 x 3 x 2	1	10	2.74
BPT-48-48-40	3 x 3 x 2 1/2	1	7	2.68
BPT-64-48-48	4 x 3 x 3	1	8	9.51
BPT-64-64-08	4 x 4 x 1/2	1	8	3.37
BPT-64-64-12	4 x 4 x 3/4	1	8	3.4
BPT-64-64-16	4 x 4 x 1	1	8	3.59
BPT-64-64-20	4 x 4 x 1 1/4	1	5	3.82
BPT-64-64-24	4 x 4 x 1 1/2	1	6	3.99
BPT-64-64-32	4 x 4 x 2	1	6	4.24
BPT-64-64-40	4 x 4 x 2 1/2	1	4	4.73
BPT-64-64-48	4 x 4 x 3	1	4	5.14



Press x Female Tee

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP12-08	1/2	8	64	0.25
BP12-12	3/4 x 3/4 x 3/4	7	56	0.35
BP12-12-12-08	3/4 x 3/4 x 1/2	7	56	0.3
BP12-16	1 x 1 x 1	7	56	0.728
BP12-16-16-08	1 x 1 x 1/2	5	70	0.42
BP12-16-16-12	1 x 1 x 3/4	5	40	0.49
BP12-20	1 1/4 x 1 1/4 x 1 1/4	4	16	0.51
BP12-20-20-08	1 1/4 x 1 1/4 x 1/2	1	50	0.53
BP12-20-20-12	1 1/4 x 1 1/4 x 3/4	1	50	0.6
BP12-24-24-08	1 1/2 x 1 1/2 x 1/2	1	32	0.81
BP12-24-24-12	1 1/2 x 1 1/2 x 3/4	1	20	0.9
BP12-32-32-08	2 x 2 x 1/2	1	12	1.15
BP12-32-32-12	2 x 2 x 3/4	1	12	1.3



Press x Pex (Crimp) Tee

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPPXT-12-12-08	3/4 x 3/4 x 1/2 Pex	10	80	0.26
BPPXT-16-16-08	1 x 1/2 Pex	7	56	0.33
BPPXT-16-16-12	1 x 1 x 3/4 Pex	7	56	0.47



Press x Press No Stop - Coupling

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP0-NSTOP-08	1/2	10	300	0.08
BP0-NSTOP-12	3/4	10	160	0.13
BP0-NSTOP-16	1	10	120	0.16
BP0-NSTOP-20	1 1/4	4	64	0.22
BP0-NSTOP-24	1 1/2	2	40	0.46
BP0-NSTOP-32	2	2	20	0.61
BP0-NSTOP-40	2 1/2	1	32	1.08
BP0-NSTOP-48	3	1	18	1.45
BP0-NSTOP-64	4	1	12	2.42



Press x Press Slip Coupling

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP0-SLIP-08	1/2	10	100	0.12
BP0-SLIP-12	3/4	10	100	0.19
BP0-SLIP-16	1	10	100	0.28
BP0-SLIP-20	1 1/4	5	50	0.39
BP0-SLIP-24	1 1/2	5	50	0.66
BP0-SLIP-32	2	5	30	0.94



Press x Press - Coupling

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP0-08	1/2	10	300	0.08
BP0-12	3/4	10	160	0.13
BP0-16	1	10	120	0.16
BP0-20	1 1/4	4	64	0.22
BP0-24	1 1/2	2	40	0.46
BP0-32	2	2	20	0.61
BP0-40	2 1/2	1	32	1.08
BP0-48	3	1	18	1.45
BP0-64	4	1	12	2.42



Press x Press Cross Over Coupling

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP36-08	1/2	10	100	0.24
BP36-12	3/4	10	50	0.41



Press x Pex (Crimp) Adapter

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPPX0-08	1/2	40	320	0.07
BPPX0-12	3/4	15	120	0.11
BPPX0-16	1	12	96	0.16



Press x Pex (F1960) Adapter

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPPXX0-08	1/2	40	320	0.07
BPPXX0-12	3/4	15	120	0.11
BPPXX0-16	1	12	96	0.16



Fitting x Press - Reducer

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP02-12-08	3/4 x 1/2	10	240	0.11
BP02-16-08	1 x 1/2	10	160	0.13
BP02-16-12	1 x 3/4	10	160	0.15
BP02-20-08	1 1/4 x 1/2	5	180	0.17
BP02-20-12	1 1/4 x 3/4	4	104	0.2
BP02-20-16	1 1/4 x 1	4	104	0.19
BP02-24-08	1 1/2 x 1/2	4	56	0.27
BP02-24-12	1 1/2 x 3/4	4	56	0.28
BP02-24-16	1 1/2 x 1	4	56	0.3
BP02-24-20	1 1/2 x 1 1/4	4	56	0.29
BP02-32-08	2 x 1/2	2	48	0.45
BP02-32-12	2 x 3/4	2	44	0.46
BP02-32-16	2 x 1	2	40	0.46
BP02-32-20	2 x 1 1/4	2	40	0.46
BP02-32-24	2 x 1 1/2	2	32	0.54
BP02-40-16	2 1/2 x 1	1	38	0.75
BP02-40-20	2 1/2 x 1 1/4	1	38	0.74
BP02-40-24	2 1/2 x 1 1/2	1	35	0.88
BP02-40-32	2 1/2 x 2	1	35	0.9
BP02-48-20	3 x 1 1/4	1	25	1.01
BP02-48-24	3 x 1 1/2	1	20	1.21
BP02-48-32	3 x 2	1	20	1.21
BP02-48-40	3 x 2 1/2	1	16	1.38
BP02-64-32	4 x 2	1	10	2.33
BP02-64-40	4 x 2 1/2	1	10	2.44
BP02-64-48	4 x 3	1	10	2.51



Press x Female Adapter

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP3-08	1/2	25	200	0.1
BP3-12	3/4	15	120	0.17
BP3-16	1	12	96	0.25
BP3-20	1 1/4	8	64	0.34
BP3-24	1 1/2	6	48	0.53
BP3-32	2	3	24	0.78
BP3-40	2 1/2	1	36	1.25
BP3-48	3	1	24	1.85



Press x Press Coupling - Reducing

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP0-12-08	3/4 x 1/2	10	240	0.12
BP0-16-08	1 x 1/2	10	120	0.16
BP0-16-12	1 x 3/4	10	120	0.18
BP0-20-08	1 1/4 x 1/2	4	72	0.43
BP0-20-12	1 1/4 x 3/4	4	72	0.24
BP0-20-16	1 1/4 x 1	4	72	0.23
BP0-24-08	1 1/2 x 1/2	4	40	1.08
BP0-24-12	1 1/2 x 3/4	4	40	0.39
BP0-24-16	1 1/2 x 1	4	40	0.38
BP0-24-20	1 1/2 x 1 1/4	4	40	0.39
BP0-32-08	2 x 1/2	1	45	0.3
BP0-32-12	2 x 3/4	2	32	0.54
BP0-32-16	2 x 1	2	32	0.46
BP0-32-20	2 x 1 1/4	2	32	0.54
BP0-32-24	2 x 1 1/2	1	32	0.64
BP0-40-16	2 1/2 x 1	1	10	0.83
BP0-40-20	2 1/2 x 1 1/4	1	10	0.85
BP0-40-24	2 1/2 x 1 1/2	1	10	0.99
BP0-40-32	2 1/2 x 2	1	30	1.05
BP0-48-24	3 x 1 1/2	1	24	1.25
BP0-48-32	3 x 2	1	24	1.29
BP0-48-40	3 x 2 1/2	1	24	1.51
BP0-64-32	4 x 2	1	10	2.09
BP0-64-40	4 x 2 1/2	1	10	2.33
BP0-64-48	4 x 3	1	10	2.48




Press x Female Adapter - NL Brass

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP3NL-08	1/2	25	200	0.13
BP3NL-12	3/4	15	120	0.17
BP3NL-16	1	12	96	0.29
BP3NL-20	1 1/4	8	64	0.41
BP3NL-24	1 1/2	6	48	0.60
BP3NL-32	2	3	24	0.87




Press x Female Adapter - Reducing

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP3-08-12	1/2 X 3/4	15	120	0.15
BP3-12-08	3/4 X 1/2	25	200	0.17
BP3-16-08	1 X 1/2	10	200	0.29
BP3-16-12	1 X 3/4	15	120	0.22
BP3-16-20	1 X 1 1/4	8	64	0.46
BP3-20-16	1 1/4 X 1	8	64	0.29
BP3-20-24	1 1/4 X 1 1/2	6	48	0.62
BP3-24-20	1 1/2 X 1 1/4	6	48	0.46



Press Fitting x Female Adapter

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP3-2-08	1/2	25	250	0.09
BP3-2-08-12	1/2 x 3/4	5	100	0.17
BP3-2-12	3/4	25	250	0.15
BP3-2-12-08	3/4 x 1/2	25	250	0.17
BP3-2-16	1	20	200	0.23
BP3-2-20	1 1/4	10	100	0.32
BP3-2-24	1 1/2	5	100	0.49
BP3-2-32	2	5	50	0.75




Press x Male Adapter

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP4-08	1/2	25	200	0.11
BP4-12	3/4	15	120	0.19
BP4-16	1	15	120	0.28
BP4-20	1 1/4	8	64	0.37
BP4-24	1 1/2	4	32	0.63
BP4-32	2	3	24	0.89
BP4-40	2 1/2	1	28	1.62
BP4-48	3	1	18	2.23
BP4-64	4	1	12	3.82



Press x Male Adapter - NL Brass

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP4NL-08	1/2	25	200	0.15
BP4NL-12	3/4	15	120	0.53
BP4NL-16	1	15	120	0.24
BP4NL-20	1 1/4	8	64	0.36
BP4NL-24	1 1/2	4	32	0.75
BP4NL-32	2	3	24	0.17



Press x Male Adapter - Reducing

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP4-08-12	1/2 X 3/4	18	144	0.19
BP4-12-08	3/4 X 1/2	15	120	0.17
BP4-12-16	3/4 X 1	15	120	0.3
BP4-16-12	1 X 3/4	15	120	0.24
BP4-16-20	1 X 1 1/4	9	72	0.45
BP4-20-16	1 1/4 X 1	8	64	0.34
BP4-20-24	1 1/4 X 1 1/2	4	32	0.59
BP4-24-20	1 1/2 X 1 1/4	5	40	0.59
BP4-24-32	1 1/2 X 2	3	24	1
BP4-32-24	2 X 1 1/2	3	24	0.92



Press Fitting x Male Adapter

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP4-2-08	1/2	5	250	0.1
BP4-2-12	3/4	5	160	0.17
BP4-2-16	1	5	200	0.27
BP4-2-20	1 1/4	5	80	0.4
BP4-2-24	1 1/2	5	75	0.59
BP4-2-32	2	5	25	0.88



Press x Female IPS 90° Elbow

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP73-08	1/2	20	160	0.32
BP73-12	3/4	10	80	0.55
BP73-16	1	7	56	0.92
BP73-20	1 1/4	4	32	1.41
BP73-24	1 1/2	2	16	2.15
BP73-32	2	2	16	3.07




Press x Male IPS 90° Elbow

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP74-08	1/2	10	80	0.27
BP74-12	3/4	12	96	0.54
BP74-16	1	9	72	0.6
BP74-20	1 1/4	4	32	1.16
BP74-24	1 1/2	2	16	1.8
BP74-32	2	2	16	2.67



Press x Female Union

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP33-3-08	1/2	12	96	0.29
BP33-3-12	3/4	10	80	0.41
BP33-3-16	1	5	40	0.8
BP33-3-20	1 1/4	4	32	0.97
BP33-3-24	1 1/2	3	24	1.67
BP33-3-32	2	3	15	2.85



Press x Male Union

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP33-4-08	1/2	12	96	0.31
BP33-4-12	3/4	10	80	0.5
BP33-4-16	1	5	40	0.89
BP33-4-20	1 1/4	4	32	1.13
BP33-4-24	1 1/2	3	24	1.6
BP33-4-32	2	3	15	2.78



Press x Press Union

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP33-08	1/2	12	96	0.33
BP33-12	3/4	10	80	0.49
BP33-16	1	5	40	0.86
BP33-20	1 1/4	4	32	1.07
BP33-24	1 1/2	3	24	1.76
BP33-32	2	3	15	2.89




Press Cap

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP17-08	1/2	10	600	0.05
BP17-12	3/4	10	300	0.08
BP17-16	1	10	240	0.1
BP17-20	1 1/4	10	120	0.15
BP17-24	1 1/2	5	60	0.28
BP17-32	2	5	40	0.41
BP17-40	2 1/2	1	40	0.68
BP17-48	3	1	36	0.97
BP17-64	4	1	24	1.67



Press Valve, Companion Flange & Dielectric Union

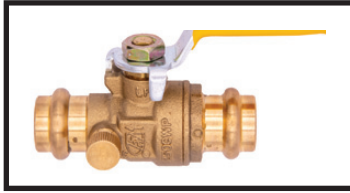

Press Ball Valve with Drain

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPVBALWD-08	1/2	10	100	0.53
BPVBALWD-12	3/4	10	40	0.87
BPVBALWD-16	1	6	36	1.29



Press Ball Valve

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPVBAL-08	1/2	10	100	0.53
BPVBAL-12	3/4	10	40	0.87
BPVBAL-16	1	6	36	1.29
BPVBAL-20	1 1/4	4	24	1.78
BPVBAL-24	1 1/2	4	16	2.47
BPVBAL-32	2	2	8	4.19
BPVBAL-40	2 1/2	1	4	8.18
BPVBAL-48	3	1	3	11.62
BPVBAL-64	4	1	3	19.39




Press Supply Stop

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BPVASC-0806	1/2 Press x 3/8 Comp Ang. 1/4 Turn CP	10	200	0.271
BPVSSC-0806	1/2 Press x 3/8 Comp Str. 1/4 Turn CP	10	200	0.271




Press Companion Flange

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
BP41-20	1 1/4 PRESS x 150 PSI	1	10	0.36
BP41-24	1 1/2 PRESS x 150 PSI	1	10	0.49
BP41-32	2 x 150 PSI	1	10	0.76
BP41-40	2 1/2 x 150 PSI	1	5	1.17
BP41-48	3 x 150 PSI	1	6	1.43
BP41-64	4 x 150 PSI	1	6	2.12

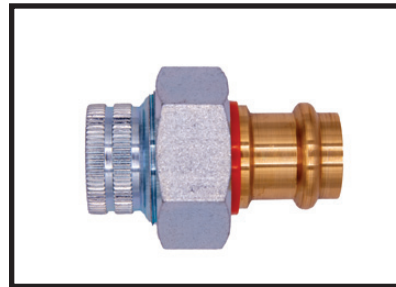

Press x Dielectric Union - Female

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
UNNL-BPF-08	1/2 PRESS x FPT	10	80	0.363
UNNL-BPF-12	3/4 PRESS x FPT	10	60	0.551
UNNL-BPF-16	1 PRESS x FPT	5	40	0.837
UNNL-BPF-20	1 1/4 x PRESS FPT	5	30	1.036
UNNL-BPF-24	1 1/2 x PRESS FPT	4	16	1.829
UNNL-BPF-32	2 x PRESS FPT	1	12	2.601

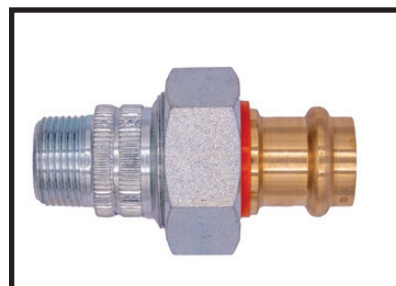

Press x Dielectric Union - Male

Part ID	Size (inches)	Inner Qty	Carton Qty	Weight (lbs)
UNNL-BPM-08	1/2 PRESS x MPT	10	60	0.418
UNNL-BPM-12	3/4 PRESS x MPT	10	40	0.606
UNNL-BPM-16	1 PRESS x MPT	5	30	0.936



CELLO PRODUCTS

210 Avenue Road, Cambridge, ON, N1R 8H5

Tel: **519-621-9150** | Toll Free: **800-265-7882** | Fax: **519-621-4108**

celloproducts.com